



Use case: Developing mobile app with Hybris + HCP services

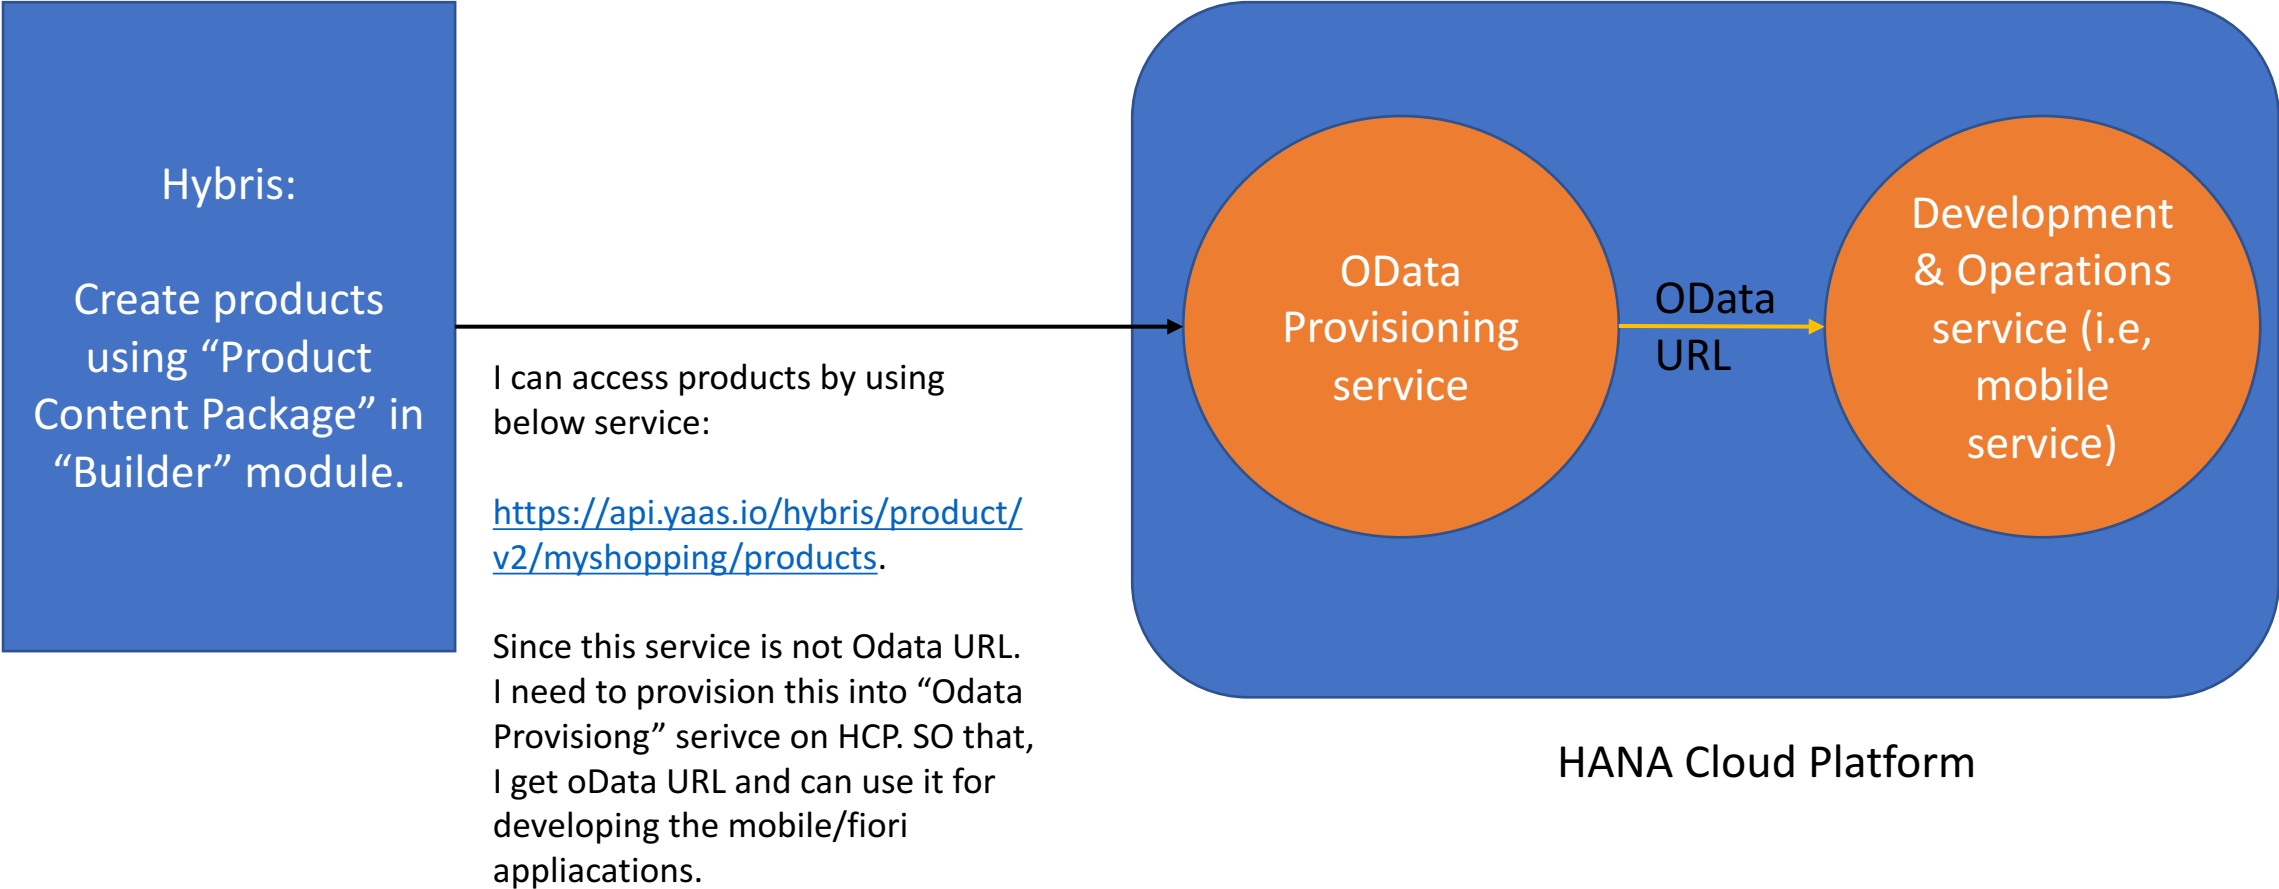

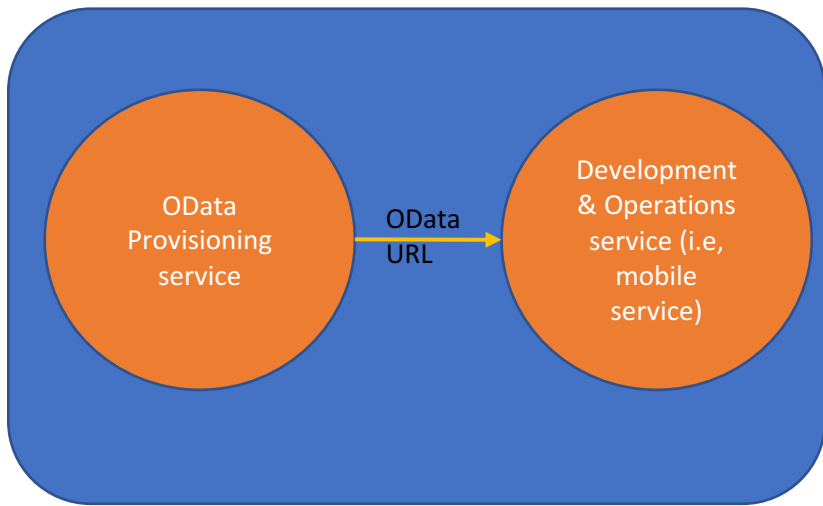

HANA Cloud Platform

In Odata provisioning:

We need to add a destination. If you look at below screenshot, we need to add **Authentication** when we create destination. This Authentication doesn't accept "Bearer Authentication".

Where as, Hybris URL:

<https://api.yaas.io/hybris/product/v2/myshopping/products> can only access by "Bearer authentication". This doesn't accept any other authentication types.

Destination Configuration

* Name:

Type:

Description:

* URL:

Proxy Type:

Authentication:

User:

Password:

- BasicAuthentication
- ClientCertificateAuthentication
- NoAuthentication
- OAuth2SAMLBearerAssertion
- PrincipalPropagation
- SAPAssertionSSO

Additional Properties

No additional properties defined

Use default JDK truststore